



GeBE-MULDE Medi Box

GPT-88535

TECHNICAL INFORMATION



Highlights at first sight:

- Thermal printer in plastic housing version
- Cutter for full and half cut for paper thickness 60 – 140 µm
- With front opening or by solenoid (via command)
- For paper width up to 86 mm and paper roll diameter up to 80 mm
- Suitable for protocol and receipt printing with text, graphics and barcodes
- High quality print of 203 dpi with speed up to 250 mm/s
- Customized versions, e.g. customer specific operation foil or housing color

The GeBE-MULDE Medi Box

The low-maintenance panel thermal printer GeBE-MULDE Medi Box (GPT-88535) with cutter for full or half cut is suitable for a paper thickness of up to 140 µm (5.51 mil) and also processes preprinted tickets. The printer can be opened either from the front or by solenoid via a software command.

The GeBE-MULDE Medi Box is equipped with a status LED, FEED and a TEST button for additional functions. A wide range of available layout commands and several character sizes allows attractive ticket designs.

The printer is available for paper rolls with a diameter of 80 mm (3.15 inch). Using the right paper, the printer can be operated in a temperature range of -20°C to +70°C (-4°F to +158°F), also for outdoor applications.

Typical applications

- Protocol printing, e.g. for documentation
- Receipt printing, e.g. at POS terminals or in retail stores (cash voucher)

Drivers


The printer controller GCT-88610 will be supported by following drivers:

- Windows® 10, 11 and Windows® CE 7.0 (others on request)
- CUPS for Linux Ubuntu 16.04 LTS, 18.04 LTS and 20.04 LTS (others on request)
- SDK for Windows® 10, 11 and Windows® CE 7.0, Android Studio up from version 3.2.1, Linux Ubuntu 16.04 LTS, 18.04 LTS and 20.04 LTS, (others on request)


Accessory

Article number	Article description
Cable	
12538	Data round cable USB 2.0 FS, USB B to USB A, length 1,800 mm (70.87 inch)
Power supply	
13619	Desktop power supply 24 VDC / 2.7A (11A peak) with shockproof plug and power supply cable
Spare parts	
14167	Solenoid to open the paper compartment cover
14373	Platen
Options	
14213	Set of paper insert to adjust the paper width
14212	Paper roll axis for 12 mm (0.47 inch) core
14515	Paper roll axis for 22 mm (0.87 inch) core
Paper	
12785	25 years paper • roll: max. ø 70 mm (2.76 inch) • core inside: ø 25 mm (0.98 inch) • width: 82.0 ±0.5 mm (3.23 ±0.02 inch) • paper thickness: approx. 80 µm (3.15 mil) • outside coated • running length: approx. 40 m (43.75 yd)
14170	25 years paper • roll: max. ø 81 mm (3.19 inch) • core inside: ø 25 mm (0.98 inch) • width: 85.5 ±0.5 mm (3.37 ±0.02 inch) • paper thickness: approx. 135 µm (5.31 mil) • outside coated • running length: approx. 33 m (36.09 yd) • blackmark
Customization	
14214	Customer specific operation foil


Technical drawings

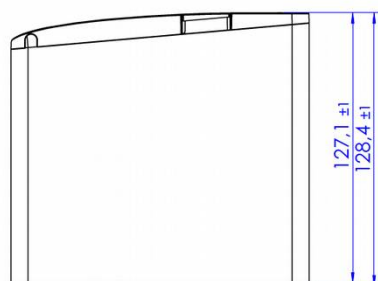


Side view from the left

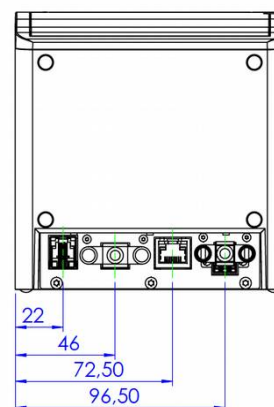


Back view

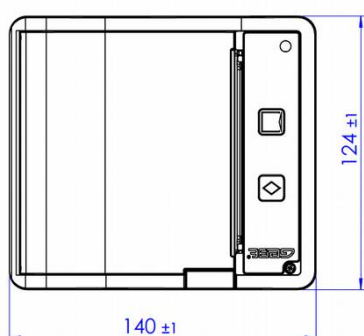

Top view

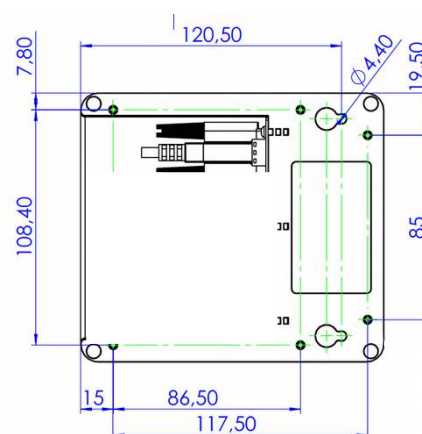

View from below

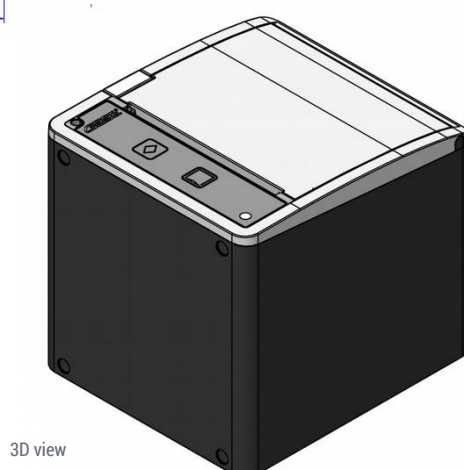

3D view

Figure 1: Dimensions GeBE-MULDE Medi Box GPT-88535 in mm

Technical data details

	GPT-88535
Insert paper	easy paper loading
Print procedure	thermal direct print
Resolution	8 dots/mm (203dpi), 640 dots/line
Print speed	max. 250 mm/s (9.84 inch/s), depending on settings
Paper width	adjustable width: 45, 54, 60, 69, 76, 80, 82.5, 86 mm (1.77, 2.13, 2.36, 2.72, 2.99, 3.15, 3.25, 3.39 inch)
Print width	80 mm (3.15 inch)
Paper thickness	60 – 140 µm (2.36 – 5.51 mil)
Paper roll diameter	max. 80 mm (3.15 inch)
Supply voltage	24 VDC ±10%
Current consumption print	adjustable via command: approx. 1.0 – 6.0 A (peak)
Current consumption solenoid	approx. 10 A / 60 ms (peak)
Current consumption without print	approx. 60 mA (depending on interface)
Available interfaces	USB 2.0 FS, RS232 and Ethernet
Sensors	PE, blackmark and head open
Fonts	11 fonts extendable, UTF-able, optional: Unicode
Barcode	EAN8, EAN13, UPCA, Code39, 2of5int, Code128, QR Code
MTBF*)	100 km (62 miles) / 1 Mio. cuts (depending on paper); 500,000 cuts at 130 µm (5.12 mil) paper thickness
Dimensions (W x H x D)	124 x 129 x 141 mm (4.88 x 5.08 x 5.51 inch)
Weight	approx. 715 g
Housing	PC ABS, color black similar to RAL9005, with transparent paper compartment cover
Environment**)	-20°C – +70°C (-4°F – +158°F) with specified paper
Humidity	10 – 90 % relative humidity, without condensation
Storage condition	-20°C – +70°C (-4°F – +158°F) at 10 – 90 % relative humidity, without condensation

*) Life cycle according to mechanism testing conditions of the manufacturer with specified paper only. Please inquire. The life cycle of the print head is an averaged expectable performance and no guaranteed data. Under optimum conditions, the above listed data can be achieved using specified paper according to our documentation TI-DE-0606.

**) In case the print head reaches the maximum ambient temperature, the printer will interrupt operation until cooling down and sends an error message. Outside the temperature range of 0°C – +50°C (32°F – 122°F), the cutting performance may be reduced.

The GeBE logo is a registered trademark of GeBE Elektronik und Feinwerktechnik GmbH. All other brands named in this brochure are properties of the respective companies.

The technical data given are non-committal information and do not represent any assurance of certain features. Errors and changes reserved.

This technical documentation is only valid until release of a revision. Please always request the newest documentation edition.

Our terms of payment and delivery apply.

Copyright © 2024 GeBE Elektronik und Feinwerktechnik GmbH.

All rights reserved.